


# KDCL PID controller with 3 soak option

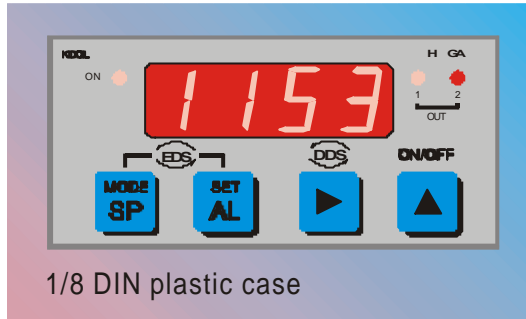

Motorised valve positioner  
HEAT- COOL  
ALARM 3 types: process, deviation+, deviation-  
Sound signal after soaks

## Main features:

**INPUT:** J, K, S, Pt100 sensors, configurable

**OUTPUT:** relay (SPST), or OPC

**ALARM:** relay (SPDT), or OPC

**SOAK** option programmable up to 63 minutes

